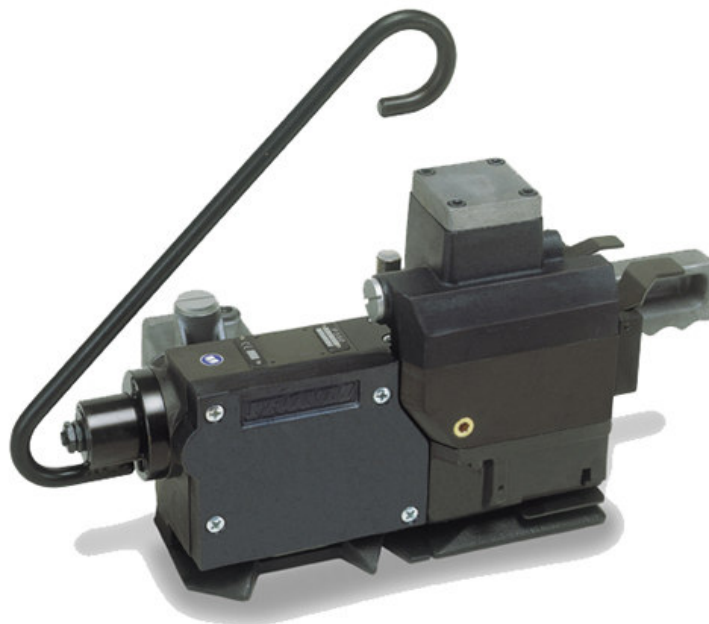


Pneumatic sealless combination strapping tool for heavy plastic straps

**Characteristics**

Strapping qualities:	Polypropylene (PP) and Polyester (PET)
Strapping dimensions:	widths 12.7 – 32.0 mm / 1/2 – 1 1/4"
	thicknesses 0.50 – 1.27 mm / .020 - .050"
Weights:	15.5 kg / 34.2 lbs without suspension
	16.5 kg / 36.4 lbs with suspension
Average seal strength:	approx. 75% of strap breaking strength (dependent on strap quality)
Sealing method:	Friction weld seal
Strap tensions:	The tool is available for two different stages of strap tension, see chart
Tension speed:	300 mm/s / 11.8"/s
Tool versions:	One button version = automatic
	Two button version = semi automatic
Suspension:	Universal suspension bracket is supplied with the tool

Advantages

- The rugged tool has been designed for heavy industrial strapping applications and is particularly suitable for continuous operation under the most demanding conditions
- Pneumatically powered and very reliable and service friendly
- The strap tension can be adjusted individually using the ten stage adjustment system – thus the package is secured with a perfectly tensioned strap
- The sealing time is set individually for a specific strap quality and thickness and a high seal strength is assured

Chart of types model P350 (P350 with strap tension 1300 – 2300 N / 290 – 520 lbs)

Item No.	Model	Strap widths		Strap thicknesses		Strap qualities		A
		mm	inch	mm	inch			
49.1103	P350/12.7/0.50-0.75/2.3	12.7	½"	0.50-0.75	.020-.030	PP	PET	-
49.1104	P350/12.7/0.50-0.75/2.3/A	12.7	½"	0.50-0.75	.020-.030	PP	PET	A
49.1203	P350/12.7/0.80-1.10/2.3	12.7	½"	0.80-1.10	.031-.044	PP	PET	-
49.1204	P350/12.7/0.80-1.10/2.3/A	12.7	½"	0.80-1.10	.031-.044	PP	PET	A
49.2103	P350/13/0.50-0.75/2.3	13.0		0.50-0.75	.020-.030	PP	PET	-
49.2104	P350/13/0.50-0.75/2.3/A	13.0		0.50-0.75	.020-.030	PP	PET	A
49.2203	P350/13/0.80-1.10/2.3	13.0		0.80-1.10	.031-.044	PP	PET	-
49.2204	P350/13/0.80-1.10/2.3/A	13.0		0.80-1.10	.031-.044	PP	PET	A
49.3103	P350/15.5/0.50-0.75/2.3	15.5		0.50-0.75	.020-.030	PP	PET	-
49.3104	P350/15.5/0.50-0.75/2.3/A	15.5		0.50-0.75	.020-.030	PP	PET	A
49.3213	P350/15.5/0.80-1.10/2.3	15.5		0.80-1.10	.031-.044	PP	PET	-
49.3214	P350/15.5/0.80-1.10/2.3/A	15.5		0.80-1.10	.031-.044	PP	PET	A
49.4103	P350/16/0.50-0.75/2.3	16.0	5/8"	0.50-0.75	.020-.030	PP	PET	-
49.4104	P350/16/0.50-0.75/2.3/A	16.0	5/8"	0.50-0.75	.020-.030	PP	PET	A
49.4213	P350/16/0.80-1.10/2.3	16.0	5/8"	0.80-1.10	.031-.044	PP	PET	-
49.4214	P350/16/0.80-1.10/2.3/A	16.0	5/8"	0.80-1.10	.031-.044	PP	PET	A
49.5113	P350/19/0.50-0.75/2.3	19.0	¾"	0.50-0.75	.020-.030	PP	PET	-
49.5114	P350/19/0.50-0.75/2.3/A	19.0	¾"	0.50-0.75	.020-.030	PP	PET	A
49.5213	P350/19/0.80-1.10/2.3	19.0	¾"	0.80-1.10	.031-.044	PP	PET	-
49.5214	P350/19/0.80-1.10/2.3/A	19.0	¾"	0.80-1.10	.031-.044	PP	PET	A
49.5313	P350/19/1.12-1.27/2.3	19.0	¾"	1.12-1.27	.044-.050	PP	PET	-
49.5314	P350/19/1.12-1.27/2.3/A	19.0	¾"	1.12-1.27	.044-.050	PP	PET	A
49.6113	P350/22/0.50-0.75/2.3	22.0		0.50-0.75	.020-.030	PP	PET	-
49.6114	P350/22/0.50-0.75/2.3/A	22.0		0.50-0.75	.020-.030	PP	PET	A
49.6213	P350/22/0.80-1.10/2.3	22.0		0.80-1.10	.031-.044	PP	PET	-
49.6214	P350/22/0.80-1.10/2.3/A	22.0		0.80-1.10	.031-.044	PP	PET	A
49.7113	P350/25/0.50-0.75/2.3	25.0	1"	0.50-0.75	.020-.030	PP	PET	-
49.7114	P350/25/0.50-0.75/2.3/A	25.0	1"	0.50-0.75	.020-.030	PP	PET	A
49.7213	P350/25/0.80-1.10/2.3	25.0	1"	0.80-1.10	.031-.044	PP	PET	-
49.7214	P350/25/0.80-1.10/2.3/A	25.0	1"	0.80-1.10	.031-.044	PP	PET	A
49.8113	P350/32/0.50-0.75/2.3	32.0	1 ¼"	0.50-0.75	.020-.030	PP	PET	-
49.8114	P350/32/0.50-0.75/2.3/A	32.0	1 ¼"	0.50-0.75	.020-.030	PP	PET	A
49.8213	P350/32/0.80-1.10/2.3	32.0	1 ¼"	0.80-1.10	.031-.044	PP	PET	-
49.8214	P350/32/0.80-1.10/2.3/A	32.0	1 ¼"	0.80-1.10	.031-.044	PP	PET	A

PP = Polypropylene

PET = Polyester

A = One button version, automatic

Chart of types model P350 (P350 with strap tension 2300 – 3800 N / 520 – 850 lbs)

Item No.	Model	Strap widths		Strap thicknesses		Strap qualities		A
		mm	inch	mm	inch			
49.1201	P350/12.7/0.80-1.10/3.8	12.7	½"	0.80-1.10	.031-.044	-	PET	-
49.1202	P350/12.7/0.80-1.10/3.8/A	12.7	½"	0.80-1.10	.031-.044	-	PET	A
49.2201	P350/13/0.80-1.10/3.8	13.0		0.80-1.10	.031-.044	-	PET	-
49.2202	P350/13/0.80-1.10/3.8/A	13.0		0.80-1.10	.031-.044	-	PET	A
49.3211	P350/15.5/0.80-1.10/3.8	15.5		0.80-1.10	.031-.044	PP	PET	-
49.3212	P350/15.5/0.80-1.10/3.8/A	15.5		0.80-1.10	.031-.044	PP	PET	A
49.4211	P350/16/0.80-1.10/3.8	16.0	5/8"	0.80-1.10	.031-.044	PP	PET	-
49.4212	P350/16/0.80-1.10/3.8/A	16.0	5/8"	0.80-1.10	.031-.044	PP	PET	A
49.5111	P350/19/0.50-0.75/3.8	19.0	¾"	0.50-0.75	.020-.030	PP	PET	-
49.5112	P350/19/0.50-0.75/3.8/A	19.0	¾"	0.50-0.75	.020-.030	PP	PET	A
49.5211	P350/19/0.80-1.10/3.8	19.0	¾"	0.80-1.10	.031-.044	PP	PET	-
49.5212	P350/19/0.80-1.10/3.8/A	19.0	¾"	0.80-1.10	.031-.044	PP	PET	A
49.5311	P350/19/1.12-1.27/3.8	19.0	¾"	1.12-1.27	.044-.050	PP	PET	-
49.5312	P350/19/1.12-1.27/3.8/A	19.0	¾"	1.12-1.27	.044-.050	PP	PET	A
49.6111	P350/22/0.50-0.75/3.8	22.0		0.50-0.75	.020-.030	PP	PET	-
49.6112	P350/22/0.50-0.75/3.8/A	22.0		0.50-0.75	.020-.030	PP	PET	A
49.6211	P350/22/0.80-1.10/3.8	22.0		0.80-1.10	.031-.044	PP	PET	-
49.6212	P350/22/0.80-1.10/3.8/A	22.0		0.80-1.10	.031-.044	PP	PET	A
49.7111	P350/25/0.50-0.75/3.8	25.0	1"	0.50-0.75	.020-.030	PP	PET	-
49.7112	P350/25/0.50-0.75/3.8/A	25.0	1"	0.50-0.75	.020-.030	PP	PET	A
49.7211	P350/25/0.80-1.10/3.8	25.0	1"	0.80-1.10	.031-.044	PP	PET	-
49.7212	P350/25/0.80-1.10/3.8/A	25.0	1"	0.80-1.10	.031-.044	PP	PET	A
49.8111	P350/32/0.50-0.75/3.8	32.0	1 ¼"	0.50-0.75	.020-.030	PP	PET	-
49.8112	P350/32/0.50-0.75/3.8/A	32.0	1 ¼"	0.50-0.75	.020-.030	PP	PET	A
49.8211	P350/32/0.80-1.10/3.8	32.0	1 ¼"	0.80-1.10	.031-.044	PP	PET	-
49.8212	P350/32/0.80-1.10/3.8/A	32.0	1 ¼"	0.80-1.10	.031-.044	PP	PET	A

PP = Polypropylene

PET = Polyester

A = One button version, automatic